


Technical features


Rated values based on standard model.

FEATURE	AWD655-2 AWD655-2XE	AWD655-2H
Weight (indicative)	65 Kg / 143 lbs.	75 Kg / 165 lbs.
Wash chamber dimension Width x Depth x Height	428x415x370 mm 16.9"x16.3"x14.6"	428x415x370 mm 16.9"x16.3"x14.6"
Wash chamber volume	65 l / 17 US gal	65 l / 17 US gal
Main water pressure	2- 5 bar 10 l/min	2- 5 bar 10 l/min
Cold water connection:		
• Connection	Male-thread G 3/4" (BSPP 3/4") Tube G 1/2" (BSPP 1/2")	Male-thread G 3/4" (BSPP 3/4") Tube G 1/2" (BSPP 1/2")
• Min. and max temperature	5°C- 20°C / 41°F- 68°F	5°C- 20°C / 41°F- 68°F
• Max. water hardness	0.7 mmol/l CaCO ₃ / 3.9 °DH / 7°fH (without water softener)	0.7 mmol/l CaCO ₃ / 3.9 °DH / 7°fH (without water softener)
Deionized water connection:		
• Connection	Male-thread G 3/4" (BSPP 3/4") Tube G 1/2" (BSPP 1/2")	Male-thread G 3/4" (BSPP 3/4") Tube G 1/2" (BSPP 1/2")
• Min. and max temperature	5°C- 20°C / 41°F- 68°F	5°C- 20°C / 41°F- 68°F
• Max. water hardness	≤ 30 µS	≤ 30 µS
Drain trap (corrosion-proof and 93°C resistant pipe)	Drain DN40 (1.6") with hose barb connection Ø25 mm (1")	Drain DN40 (1.6") with hose barb connection Ø25 mm (1")
Min. and max working temperature	5°C- 40°C / 41°F- 104°F	5°C- 40°C / 41°F- 104°F
Max environment humidity	80%	80%
Max working altitude ASL (above sea level)	2000 m / 6562 ft	2000 m / 6562 ft

Machines external dimensions

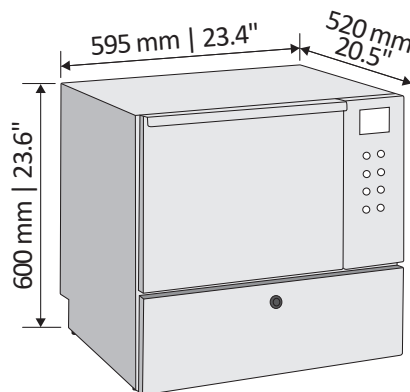

AWD655-2 | AWD655-2XE

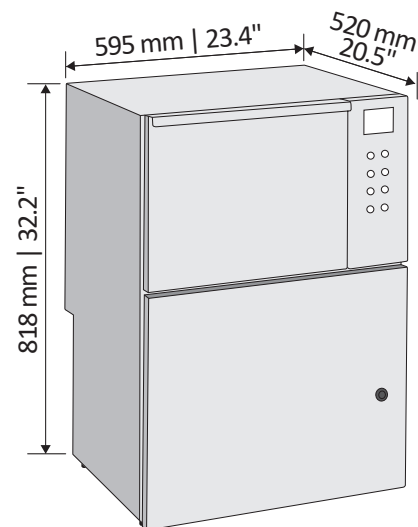

AWD655-2H



AT-OS SRL

Viale del Lavoro, 19- 37030 Colognola ai Colli - Verona - ITALY

Tel (+39) 045 6159411- Fax (+39) 045 6159422

info@at-os.com | www.at-os.com

